


Doormerica

ED501 / EDF501 - Standard Duty Commercial Rim Exit Device

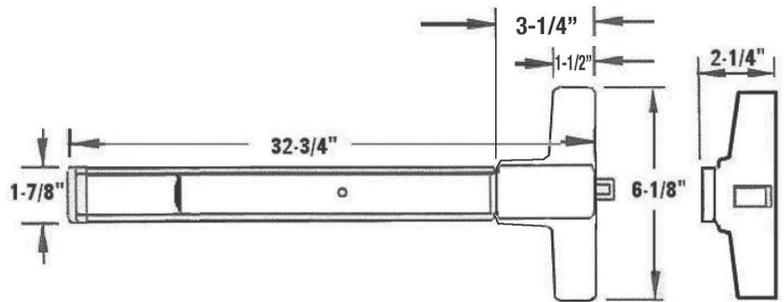

Features:

- Deadlatching and Non-Handed.
- Dogging Standard Only on NON-UL listed Device.
- Baked Enamel Aluminum (AL) and Durododic (DU) Finish.
- For all doors up to 36".
- PEDPS01 & PEDSS01 -Standard Strike and Shim.
- PEDFP161 & PEDFP-ANSI -Latch & Strike Filler Plate.
- PEDSNB -Standard with Sex Bolts.
- EDF501 -UL Listed for Fire and Egress -Listed for 1-1/2 Hour for Doors Under 38" (3'-2") x 86" (7'-2").

Options:

- Stocked 48" length, specify "L" (for non rated device)
- EDS551 -Exit Device made from Stainless Steel.
- ALRMKIT500 -Alarm Kit. Mortise Cylinder NOT Included
- ETLHL500 -Entry Function -Lever -161 Cylindrical Prep.
- ETLHL580 -Storeroom Function -Lever -161 Cylindrical Prep.
- ETPP05 -Pull Plate with Cylinder cut-out, Rim Cylinder NOT Included.
- ETPP06 -Pull Plate Only.



CODE COMPLIANCE:

- ANSI A 156.3 Grade 2. UL 1 OC and UBC 7.2 for positive pressure.
- ANSIA117.1 and ADA for barrier-free accessibility
- C-UBC -California Amended Uniform Builders Code -2001
- NFPA-80 -National Fire Protection Association 1999
- NFPA-101 National Fire Protection Association Life Safety -2000

1 YEAR LIMITED WARRANTY

Stocked Product

Item	Finish
ED501 (36" & 48")	Aluminum, Duro
EDF501	Aluminum, Duro
EDS551	Stainless Steel