


Doormerica

EDFV701 x LBR - Heavy Duty Grade 1 Vertical Rod Fire Rated - Less Bottom Rod

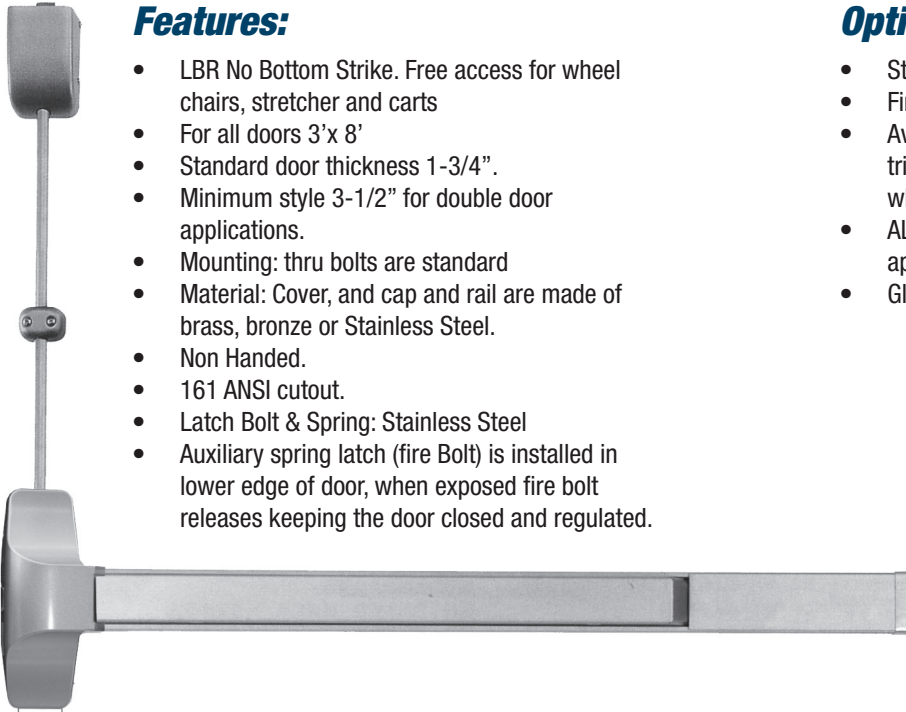


Features:

- LBR No Bottom Strike. Free access for wheel chairs, stretcher and carts
- For all doors 3' x 8'
- Standard door thickness 1-3/4".
- Minimum style 3-1/2" for double door applications.
- Mounting: thru bolts are standard
- Material: Cover, and cap and rail are made of brass, bronze or Stainless Steel.
- Non Handed.
- 161 ANSI cutout.
- Latch Bolt & Spring: Stainless Steel
- Auxiliary spring latch (fire Bolt) is installed in lower edge of door, when exposed fire bolt releases keeping the door closed and regulated.

Options:

- Stocked 48" x 96" length, specify "L"
- Fire bolt separate part number FB385
- Available different functions. Lever escutcheon trims are Grade 1 construction with clutch free wheeling mechanism. Covers 161 cutout.
- ALRMKIT700 Alarm Kit available for 3' & 4' applications.
- Glass Bead Kits available.



Dimensions:

Touchbar height to finished floor.....	41" at center
Touchbar Projection	
Neutral	2-1/2"
Depressed.....	1-3/4"
Center case	8-1/2" x 2-1/2" x 2"
Device length Short 3'	2'2" to 3'
Long 4'	2'9" to 4'
Panic grade top latch case	3-15/16" x 2-1/8" x 1-3/8"
Fire grade top latch case	3-15/16" x 2-11/16" x 2-1/16"
Top rod length for 36" x 84" doors.....	Top Rod 50"
Top rod length for 48" x 96" doors.....	Top Rod 50"
Vertical rod	1/2" Round tubing



CODE COMPLIANCE:

- ANSI A165.3, Grade 1
- UL & ULC listed. LBR series for fire exit hardware for all types of 8' x 8' double doors including double egress for up to 3 hour metal, H/2 hour wood doors fire labeled installations. Conforms to standard UL 1DC, UBC 7-2-1997 codes.

LIMITED LIFETIME WARRANTY

Stocked Product

Item	Finish
EDFV701 x LBR	10B, 28, 32D
36" x 96", 48" x 96"	