


COR 60 / COR 72 / COR 84 - Coordinator and Accessories

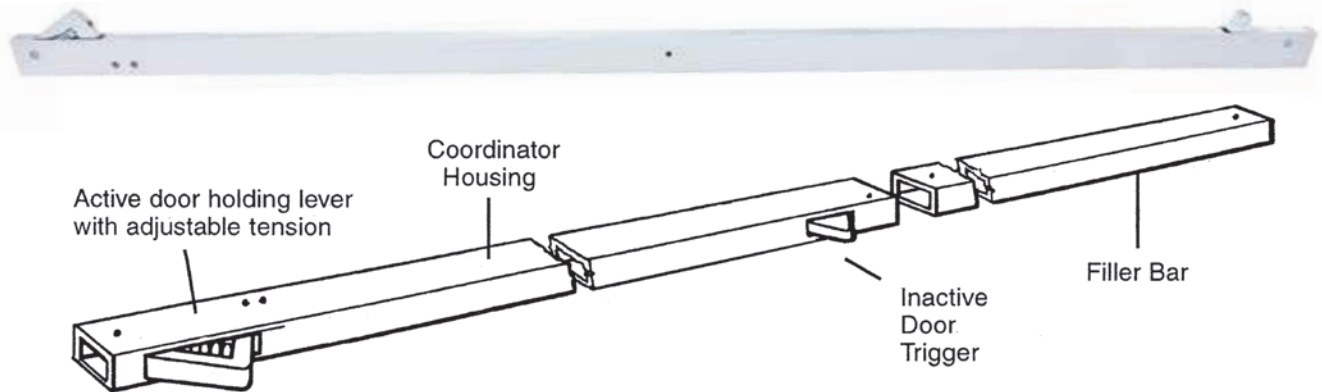

FEATURES:

- Extruded Aluminum Housing.
- Adjustable Tension Override Spring.
- Filler Bar provided allowing an even, unbroken line the full width of the opening.
- Mounting Screws #12 x 24 x 1-1/4" MS.
- For use on Fire Rated Openings.

OPTIONS:

	Opening Width	Coordinator Size	Filler Size
COR 60	5'	42"	18"
COR 72	6'	52"	20"
COR 84	7'	52"	32"

SPECIFICATIONS:

Coordinator – Coordinator shall be by Doormerica model number COR flat bar type and made from extruded Aluminum. Coordinator shall control the closing sequence so the active door is held open until the inactive door closes, triggering the release of the active door allowing for proper latching. Filler bar shall be provided allowing an even, unbroken line the full width of the opening. Optional PCORMB434 or PCORMB414 shall be ordered for each piece of hardware to be mounted over the bar coordinator.




CODE COMPLIANCE:

- ANSI 156.3 Type 21A.
- Conforms to UL10C and UBC 7-2.
- ANSI A117.1 and ADA for barrier-free accessibility.
- C-UBC - California Uniform Builders Code.
- NFPA 80 - National Fire Protection Association.
- NFPA 101 - National Fire Protection, Life Safety .


1 YEAR LIMITED WARRANTY



PCORMB434 Mounting Bracket (1 step)
Jamb Depth 4-3/4" Min.
5/8" Stop Height - For Stop over 2-1/4"
(sold as pair)

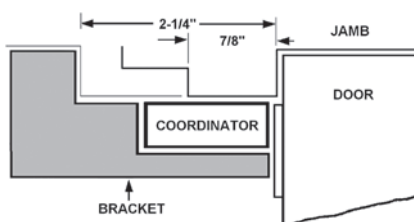

PCORMB414 Mounting Bracket (2 step)
Jamb Depth 4-1/4" Min.
5/8" Stop Height - For Stop Width 7/8" to 2-1/4"
(sold as pair)

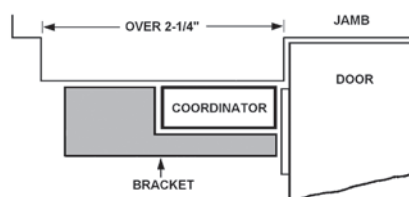

STOCKED PRODUCT

Item	Finish
COR 60	Aluminum
COR 72	Aluminum
COR 84	Aluminum
PCORMB414	Black
PCORMB434	Black